
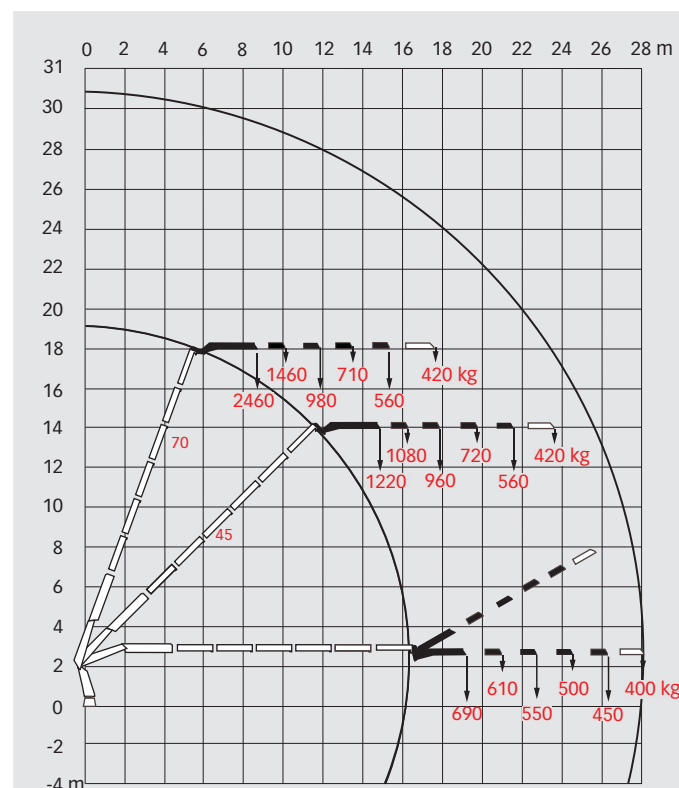
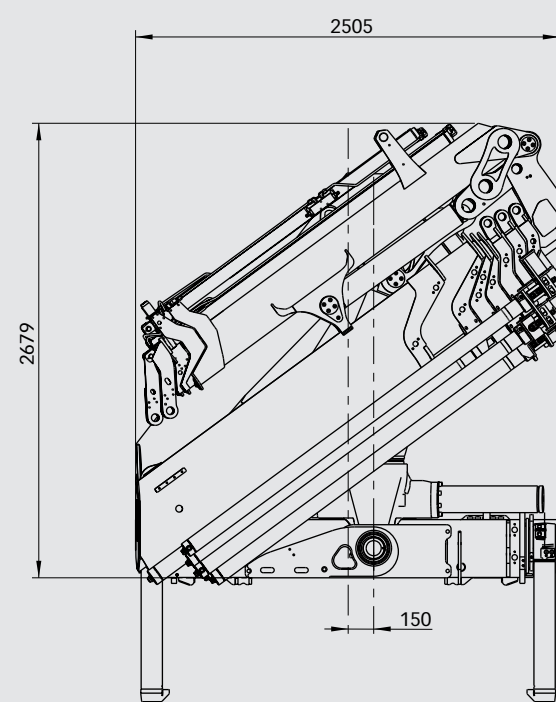


HIAB XS 377 Basic data

> HIAB XS 377 E-6 HiPro jib 70X-4

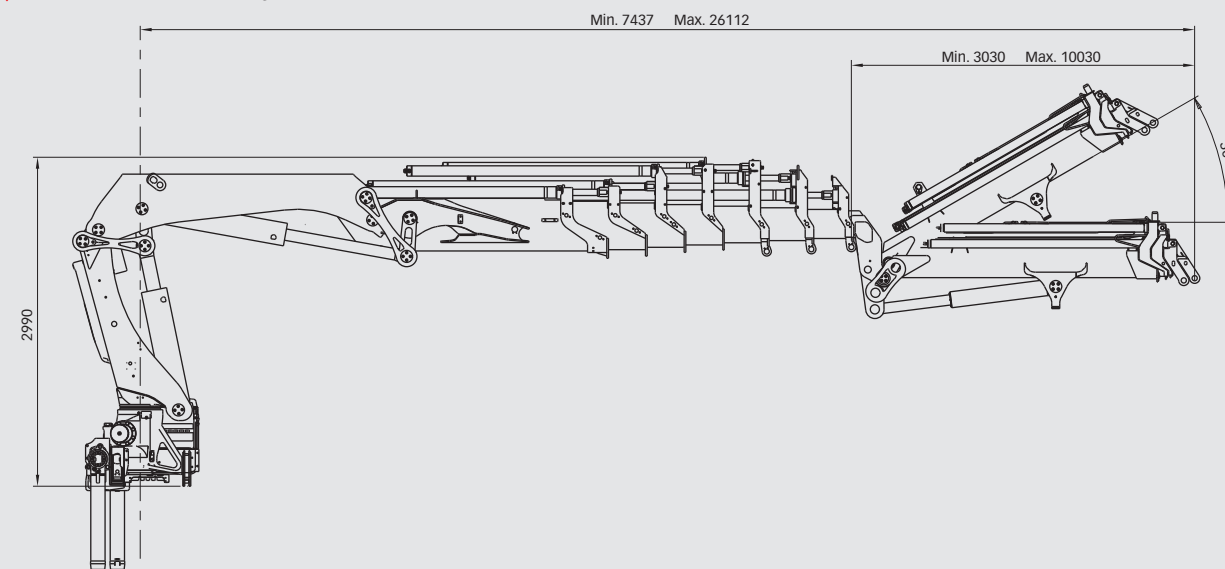


Disclaimer

Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001. Hiab's certified Quality Assurance System complies with the ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

BD-377-EN-EU_071116

HIAB XS 377 Range 33-37 tm

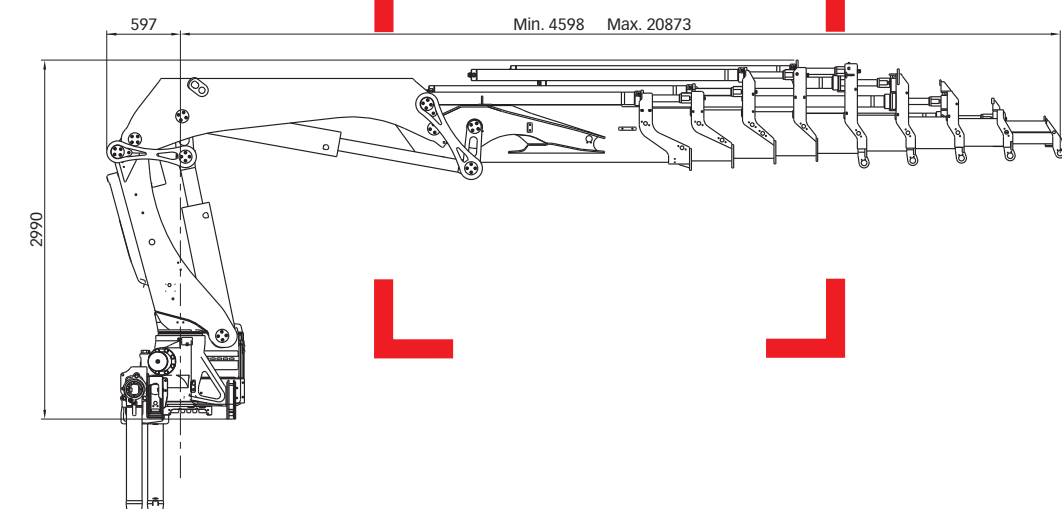

Basic data

www.hiab.com



HIAB
 XS
 377
 Basic data

Technical data	EP-2 HiPro	EP-5 HiPro	E-6 HiPro	E-8 HiPro
Max. lifting capacity (kNm)	351	332	322	313
Outreach - hydraulic extensions (m)	8.0	15.0	16.1	20.9
Outreach - manual extensions (m)	-	17.4	19.9	22.4
Outreach - Jib (m)	-	-	26.1	-
Outreach / Lifting capacity, standard (m / kg)	3.5 / 10000	3.2 / 10000	3.2 / 10000	3.1 / 10000
	4.2 / 8500	4.4 / 7700	4.4 / 7500	4.6 / 6900
	5.9 / 6000	6.2 / 5300	6.1 / 5100	6.3 / 4700
	7.9 / 4550	8.2 / 3850	7.9 / 3750	8.1 / 3400
	-	10.4 / 2940	9.7 / 2940	9.9 / 2600
	-	12.7 / 2360	11.7 / 2360	11.9 / 2020
	-	15.0 / 1980	13.8 / 1940	14.0 / 1620
	-	-	16.0 / 1660	16.2 / 1340
	-	-	-	18.5 / 1140
	-	-	-	20.8 / 1000
Outreach / Lifting capacity, with Jib (m / kg)	-	-	19.1 / 690	-
	-	-	20.6 / 610	-
	-	-	22.3 / 550	-
	-	-	24.1 / 500	-
	-	-	26.0 / 450	-
Slewing angle	420°	420°	420°	420°
Height in folded position (mm)	2420	2420	2692	2420
Width in folded position (mm)	2500	2500	2504	2504
Installation space needed (mm)	1117	1248	1315	1275
Weight - "standard" crane without stabilizers (kg)	3210	3820	4080	4380
Weight - stabilizer equipment (kg)	515 - 614	515 - 614	630 - 840	515 - 614
Weight - jib (kg)	-	-	770	-

